




Curb Mount Glass Glazed Skylight Insulated Curb

Model CMGGIC

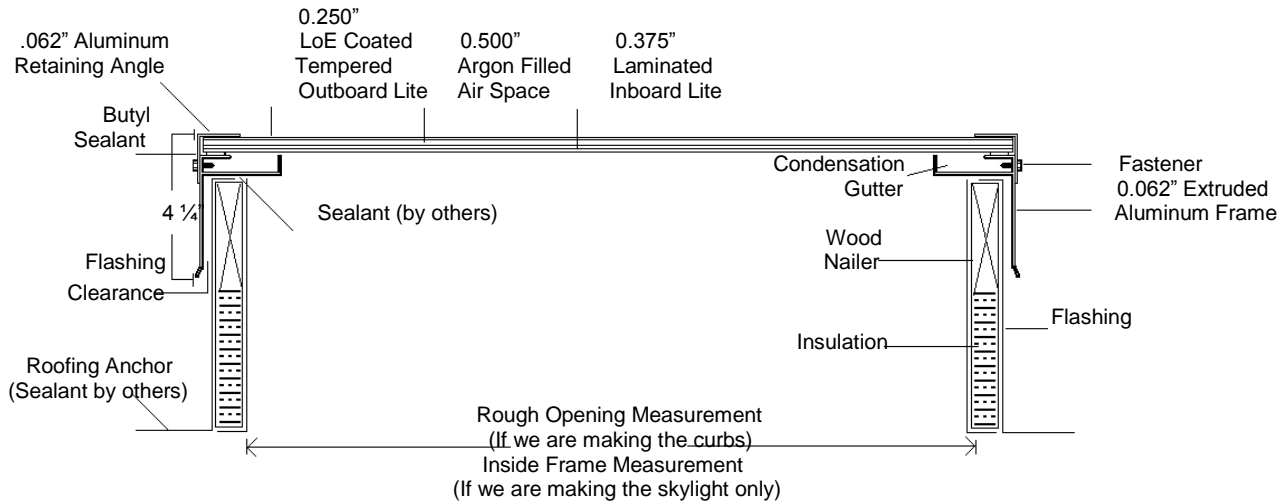

SPECIFICATIONS:: Curb Mount Skylights with glass glazing shall be manufactured by Lubbock Skylight Manufacturing [(800) 390-2301]. Each skylight shall be factory assembled with glass glazing. Glass will have a 0.250" LoE coated, tempered outboard lite, 0.500" argon filled air space and a 0.375" laminated inboard lite. Overall thickness of glass shall be 1.125". Glass is available in bronze, gray or clear. Laminate is available in clear or white, but default is clear unless otherwise specified. Frames shall be .062" extruded aluminum (6063-T5) with welded corners and an integral condensation gutter. Finish shall be natural aluminum (mill), bronze or custom color. Skylight is designed and manufactured to meet or exceed standard of 40 psf live load and 20psf (uplift). Available with or without curbs (insulated or non-insulated). Curbs shall be 9" tall (unless otherwise specified). Standard curbs shall be a wood nailer and flashing. Insulated curbs consist of 1 1/2" Dow® polystyrene insulation, wood nailer and flashing. All flashing shall be 0.040" aluminum with welded corners. **ALL UNITS ARE GUARANTEED AGAINST DEFECTIVE WORKMANSHIP AND MATERIAL.**

PROJECT NAME	PO / JOB #	NEED DATE	TODAY'S DATE
PROJECT DELIVERY ADDRESS	CITY / STATE / ZIP	SITE CONTACT / PHONE	
REQUESTED BY	PHONE	COMPANY	
ADDRESS	CITY / STATE / ZIP	APPROVAL SIGNATURE	

COLOR			Laminate	
<input type="checkbox"/> GRAY	<input type="checkbox"/> BRONZE	<input type="checkbox"/> CLEAR	<input type="checkbox"/> CLEAR	<input type="checkbox"/> WHITE

****Some Sizes May Have Color And/Or Material Limitations****

SKYLIGHT FRAME FINISH	CURB OPTIONS	QTY	INSIDE FRAME MEASUREMENT	ROUGH OPENING
<input type="checkbox"/> NATURAL ALUMINUM (MILL)	<input type="checkbox"/> NO CURB NEEDED			
<input type="checkbox"/> BRONZE PAINT	<input type="checkbox"/> SEAL SKYLIGHT TO CURB			
<input type="checkbox"/> CUSTOM COLOR _____	<input type="checkbox"/> NATURAL ALUMINUM (MILL)			
	<input type="checkbox"/> CUSTOM COLOR _____			
	<input type="checkbox"/> INSULATED			
	<input type="checkbox"/> NON-INSULATED			

CURB HEIGHT	
<input type="checkbox"/> 6"	<input type="checkbox"/> 12"
<input type="checkbox"/> 9"	<input type="checkbox"/>

IF WE ARE MAKING THE CURBS--WE NEED THE ROUGH OPENING MEASUREMENT. IF YOU ARE MAKING THE CURBS OR USING EXISTING CURBS--WE NEED THE INSIDE FRAME MEASUREMENT THAT IS BIG ENOUGH TO FIT OVER YOUR CURB, FLASHING, ROOF WORK PLUS 1/2" FLASHING CLEARANCE.