



800.390.2301 Phone or Fax      w w w . L B K S k y l i g h t . c o m


::AUSTIN:: 512.320.9972

::OKC:: 405.445.3487

::CORPORATE OFFICE | 701 N Interstate 27 | Lubbock, TX 79403 | 806.744.2300::

**Curb Mount Structured Polycarbonate Insulated Curb CMMWIC**

**Curb Mount Double Domed Custom Curb CMDDCC**

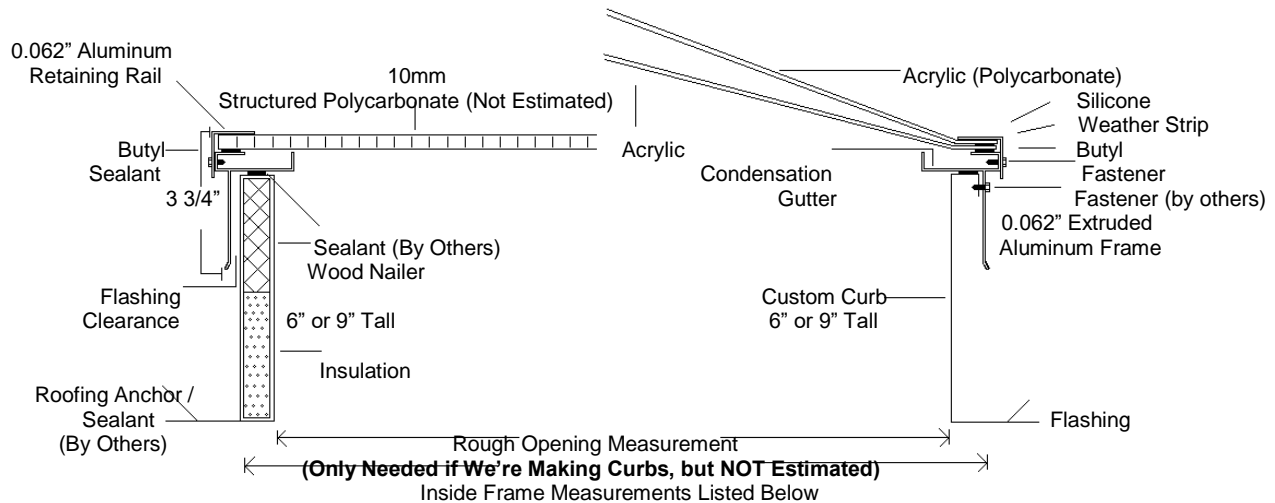

**SPECIFICATIONS::** Curb Mount Skylights shall be manufactured by LBK Skylight Manufacturing [(800) 390-2301]. Each skylight shall be factory assembled with 2447 white or 2412 bronze acrylic over clear acrylic:: 0.118" over 0.118" (standard duty), 0.187" over 0.118" (commercial duty) or 0.177" 100% DR Impact Modified over 0.177" (fall protection). One other option which is restricted by size and color is 10 mm opal (white) structured polycarbonate. Frames shall be .062" extruded aluminum (6063-T5) with welded corners and an integral condensation gutter. Estimated finish shall be mill / natural aluminum. Skylight is designed and manufactured to meet or exceed standard of 40 psf live load and 20psf (uplift). Available with or without curbs. Some sizes may have color and/or material limitations. ALL UNITS ARE GUARANTEED AGAINST DEFECTIVE WORKMANSHIP AND MATERIAL.

10MM STRUCTURED POLYCARBONATE	ACRYLIC COLOR OPTIONS		DOMED SKYLIGHT TYPE		
<input type="checkbox"/> WHITE	<input type="checkbox"/> BRONZE OVER CLEAR	<input type="checkbox"/> WHITE OVER CLEAR	<input type="checkbox"/> STANDARD	<input type="checkbox"/> COMMERCIAL	<input type="checkbox"/> FALL PROTECTION

SKYLIGHT FRAME FINISH
<input type="checkbox"/> NATURAL ALUMINUM (MILL)
<input type="checkbox"/> BRONZE PAINT
<input type="checkbox"/> CUSTOM COLOR

CURB OPTIONS
<input type="checkbox"/> NO CURB NEEDED
<input type="checkbox"/> SEAL SKYLIGHT TO CURB
<input type="checkbox"/> NATURAL ALUMINUM (MILL)
<input type="checkbox"/> CUSTOM COLOR _____
<input type="checkbox"/> INSULATED
<input type="checkbox"/> NON-INSULATED

CURB HEIGHT	
<input type="checkbox"/> 6"	<input type="checkbox"/> 12"
<input type="checkbox"/> 9"	<input type="checkbox"/>

QTY	INSIDE FRAME MEASUREMENT	ROUGH OPENING

IF WE ARE MAKING THE CURBS--WE NEED THE ROUGH OPENING MEASUREMENT. IF YOU ARE MAKING THE CURBS OR USING EXISTING CURBS--WE NEED THE INSIDE FRAME MEASUREMENT THAT IS BIG ENOUGH TO FIT OVER YOUR CURB, FLASHING, ROOF WORK PLUS 1/2" FLASHING CLEARANCE.

PROJECT NAME	PO / JOB #	LEAD TIME (IN BUSINESS DAYS)	TODAY'S DATE
PROJECT DELIVERY ADDRESS	CITY / STATE / ZIP	SITE CONTACT / PHONE	
REQUESTED BY	PHONE	COMPANY	
ADDRESS	CITY / STATE / ZIP	APPROVAL SIGNATURE	